



FACTORY FURNITURE



FINGER signpost

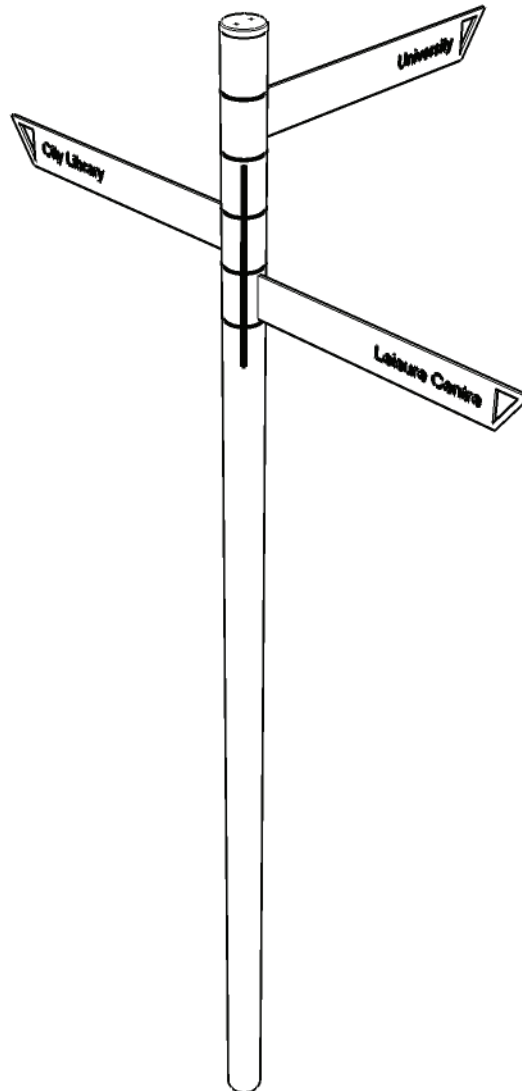

Operation & Maintenance Manual

Introduction

Design

Design, shop drawings and development by Factory Furniture Ltd.

Manufacture

Factory Furniture manufactured components. Products are assembled in Factory workshops, checked and dispatched ready for installation. Replacement products or components thereof should be ordered direct from Factory Furniture Ltd.

Copyright

The design copyright for the product and drawing copyright remains the sole property of Factory Furniture Ltd.

General Specifications

Signpost (max dims)

Metric length 1490mm | width 1490mm | height 3135mm*

Imperial length 4' 10½" | width 4' 10½" | height 10' 3½"

* Not including +500mm below ground level for sub-surface fix

Approx Weight 36kg + 3kg per finger added

fixing method Root fixed 500mm (1' 7½")

Detailed Material & Finish Specifications

Post

- Manufactured from stainless steel
- Root fixed 500mm (1' 7½") into concrete foundation pad

Spacers and other fittings

- Manufactured from stainless steel

Fingers

- Manufactured from stainless steel
- Up to 4 no. fingers per collar (north, south, east or west)
- Lettering is white vinyl (height - 30mm caps / 22mm lower case). Lettering in white and arial font as standard (or to client specification). A maximum of 24 characters can be fitted on each finger. Lettering applied to both sides of the finger

General Maintenance *(Recommended Schedule & Guidelines)*

Daily/Weekly/Monthly *(or as adopted)*

Visual checks of post, fingers and lettering - check all items for superficial or physical damage.

Three Monthly

Clean all items as detailed below check all fixings are seated correctly

Six Monthly

Secure all fixings; full clean as detailed below; check that seat/bench is firmly secured to the ground

Specific Maintenance Details

Stainless Steel *(polished stainless steel only)*

Clean as required, but at least every three months, using a stainless steel polish and a lint free cloth. To remove ground in dirt, a stainless steel finishing pad may be required.

Vinyl Lettering

For general cleaning using a damp cloth and warm soapy water only. Scourers and abrasive cleaners are NOT suitable for these types of finish and may damage them. Before using any cleaning agents to remove graffiti etc. try on a small, inconspicuous area first to avoid causing more unsightly damage.

Repairs

Stainless Steel

Light damage (surface scratches etc.) can be removed using an emery pad (240 grit) and freeing oil such as 'WD40'. Care should be taken to follow the direction of the brushing grain. It is recommended that a trial repair be carried out on an unimportant surface first. No corrosive cleaners or other abrasives should be used. Any contamination, particularly carbon steel scuffs from vehicles, should be quickly removed to avoid corrosion.

Vinyl Lettering

For repairs to the vinyl lettering, the finger in question should be returned to Factory Furniture Ltd.

Heavy Damage

In the event of serious damage to any component, replacements should be ordered from Factory Furniture Ltd. In this event (or if the product needs to be disassembled for any reason), please contact Factory Furniture for detailed technical advice.

Reordering / Spares

Part No.	Item Description
P4050 / 01	1 no. Sign finger*
P4050 / 02	1 no. Blank collar (no finger)
	* Please specify required lettering on finger at time of ordering. Please specify if multiple fingers are required on one collar at time of ordering (up to 4 no. max) and each finger's required orientation (north, south, east or west)

Instructions For Reordering

If possible, please specify job name or number at the time of reordering to enable identification of details such as the original species of timber used, stainless steel finishes and polyester powder coat colours etc. In any event where either, additional orders are required, or spares and replacements are required please contact Factory Furniture Ltd. Using the part numbers given above as reference should help us to process your enquiry more efficiently.

Note - All fittings required to assemble ordered parts will automatically be included in the order.

AutoCAD Drawing List

FF4050 / 01	FINGER SIGNPOST	OVERVIEW AND X-SECTION
FF4050 / 02	FINGER SIGNPOST	PART FABRICATION DETAILS



Contacts

Factory Furniture Ltd
5 Pioneer Road
Faringdon, Oxon
SN7 7BU UK

Tel +44 (0) 1367 242731
Email hello@factoryfurniture.co.uk
Web www.factoryfurniture.co.uk


Installation Instructions

ALL INSTALLATION WORKS TO BE CARRIED OUT BY COMPETENT PERSONNEL - INSTALL AS COMPLETE UNIT

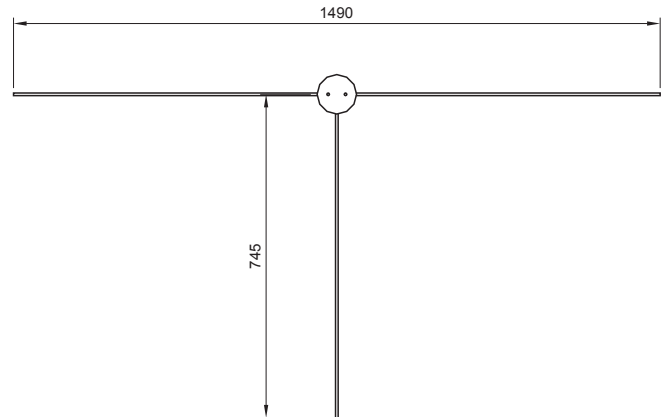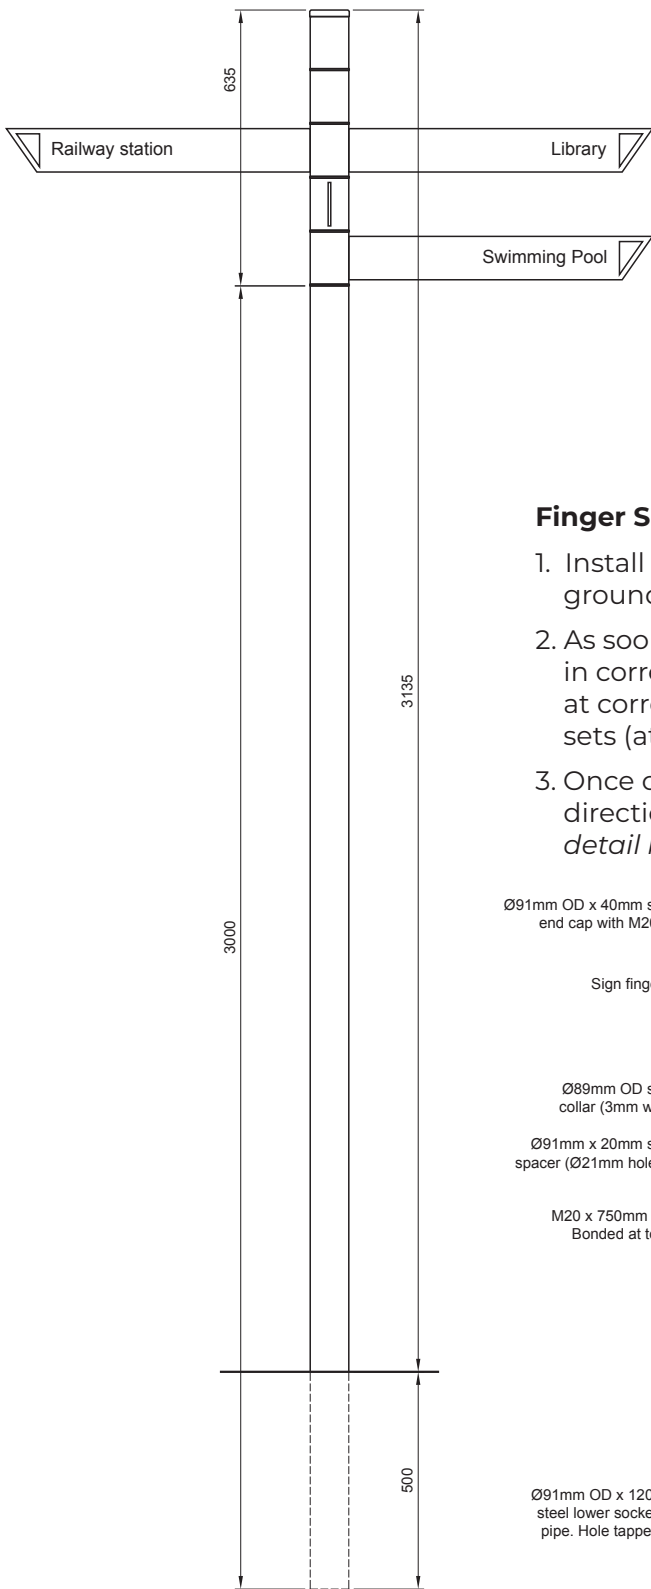

Finger Signpost (*sub-surface fix only*)

1. Install suitable foundation pad (see illustration) with top face at ground level
2. As soon as possible after pouring concrete for pad, position signpost in correct orientation centrally in foundation pad. Maintain signpost at correct height (500mm below ground) and vertical whilst concrete sets (at least 24 hours).
3. Once concrete has set, if necessary, point fingers in desired directions and then screw down endcap to hold them all in place (see detail below)

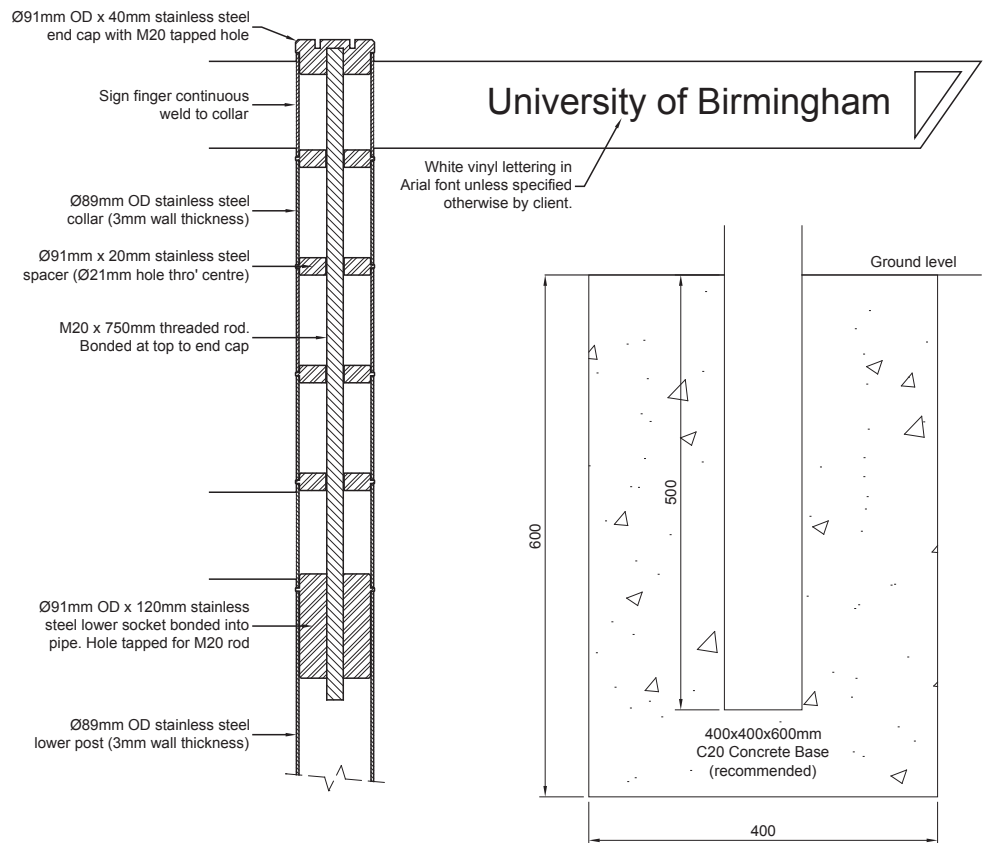

Finger Signpost (*detail*)